
This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.


ASSY QTY

B/O

SWA3-400

REVISIONS .									
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED				
2		AS DRAWN BY CANAM.	8/31/2012	JAG					
3	16-0104	UPDATED TO NEW STANDARD. CH'D DIM WAS .200 +.000003 IS .180. ADDED DIM (5/16-24 UNF-2A).	8/11/2016	DEW	SM				



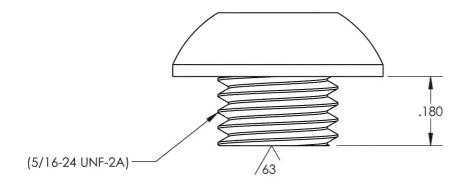

DWG NO.

BUTTON HEAD SCREW SWA-3A SWIVEL

7/16/1997

SHEET 1 OF 1

SWA3-400 MAT'L S.S. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

.XXX ± .005 FRACTIONS ± 1/8

.XX ± .01 ANGLES ± .5°

.X ± .1 SURFACES = 125/ SPEC A T.I.

1. BREAK ALL SHARP EDGES

.015 x 45° OR .015R

2. DIMENSIONAL LIMITS APPLY
AFTER PLATING
3. INTERPRET DIM AND TOL PER
ASME Y14.5M-2009 DRAWN BY: CANAM CHECKED: DUERFELDT OPPS APPR: ANDERSON A APPR: LINDSAY USED ON MODEL

MACKOVJAK

UNIT QTY	Description	Material	b/o information or specifications	PG.	QA APPR: APPROVED:
1	BUTTON HEAD SCREW	S.S.	5/16-24 X 3/8 MCMASTER-CARR #92949A595 (MODIFIED)	1	SCALE